

STORM 


TECHNICAL SERVICES FOR
EVENTS, THEATRE, MUSIC,
EXHIBITION, FILM & TV

01483 757211

HIRE@STORMLTD.CO.UK

WWW.STORMLTD.CO.UK

GZA 2003 TV A 2003 UHF

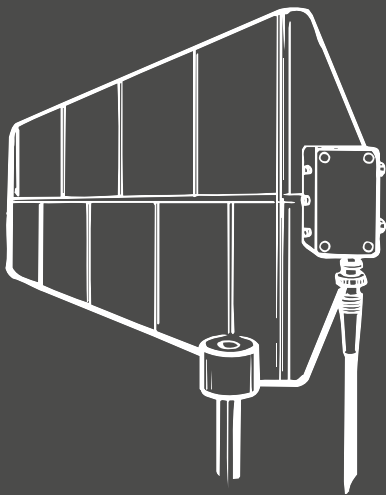

Gebrauchsanleitung
Instructions for use
Notice d'emploi
Istruzioni per l'uso
Instrucciones para el uso
Gebruiksaanwijzing

GZA 2003 TV

Active directional aerial with integrated multi-coupler. Can be tuned to a television channel in a frequency range of 450 to 960 MHz. Signals are fed directly from the receiver through the aerial feeder. The Sennheiser receivers EM 3031/32-U and EM 3532-U are suitable.


A 2003 UHF

Passive version without integrated multi-coupler. Broad-band. Suitable for all receivers in a frequency range of 450 to 960 MHz.

| Technical Data of Aerial | |
|-----------------------------|------------------|
| Frequency range | 450 – 960 MHz |
| Apex angle (-3 dB) | approx. 100° |
| Front/back ratio | > 14 dB |
| Gain | approx. 4 dB |
| Connector | BNC jack, 50 Ohm |
| Dimensions in mm | 258 x 273 x 35 |
| Weight (with multi-Coupler) | approx. 360 g |

| Technical Data of Multi-Coupler (GZA 2003 TV only) | |
|--|-------------------------------|
| Tuning range | 450 – 960 MHz |
| Effective bandwidth (3 dB) | 16 – 25 MHz |
| Gain | 10 – 13 dB |
| Intermodulation span | > 74 dB |
| Operating voltage feeder | 10/24 volts via aerial feeder |
| Current input at 10/24 volts | 25 / 17 mA |

We reserve the right to make alterations.

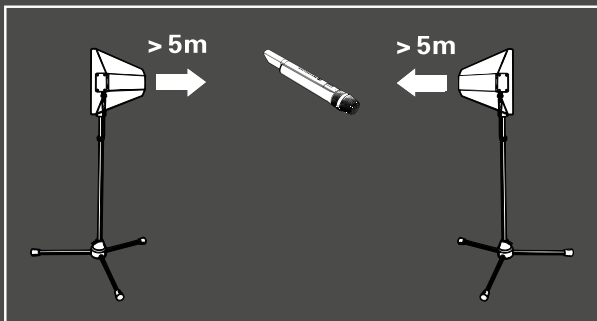

Antenne mit ihrem 3/8"- oder 5/8"- Innengewinde auf einem Stativ befestigen.
Auf den Sender ausrichten.

Fasten the 3/8" or 5/8" internal thread of the aerial to a stand.
Orientale it toward the transmitter.

Fixer l'antenne sur un support au niveau de son taraudage 3/8" ou 5/8".
L'orienter vers l'émetteur.

Fissare l'antenna con la sua filettatura interna di 3/8" o 5/8" su un treppiede.
Orientarla verso il trasmettitore.

Fijar la antena con rosca interna de 3/8" ó 5/8" sobre un trípode.
Orientarla hacia el transmisor.

De antenne met het 3/8" of 5/8" moerdraad op een statief bevestigen.
Op de Zender richten.

 **SENNHEISER**

Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 07/15, 037664 / A02